


Optical Splitter

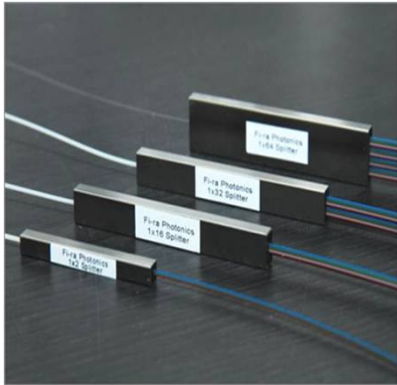

Specification

Parameter	Unit	1x2	1x4	1x8	1x16	1x32	1x64
Insertion Loss (MAX) S/P	dB	≤4.0/3.8	≤7.3/7.0	≤10.5/10.2	≤13.8/13.5	≤16.8/16.5	≤20.4/20.0
Uniformity (MAX) S/P		≤0.5/0.5	≤0.6/0.5	≤0.8/0.6	≤1.0/0.7	≤1.2/1.0	≤1.5/1.5
PDL (MAX) S/P		≤0.2/0.15	≤0.02/0.15	≤0.2/0.2	≤0.25/0.2	≤0.25/0.2	≤0.3/0.2
Return Loss / directivity		≥55					
Operating Wavelength	nm	1260 ~ 1650					
Operating Temperature	°C	-40 ~ +85					
Storage Temperature		-40 ~ +85					