


CWDM module

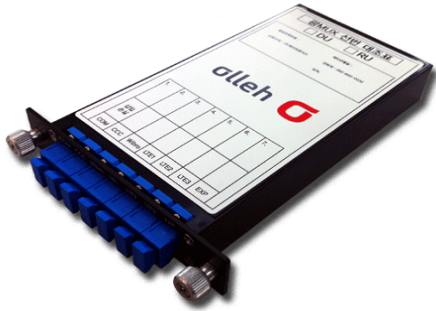

Specification

parameter	Specification	Remarks
Insert Loss	≤ 3.5 dB	Ling Loss
Pass band width	$> \pm 7.5$	
Return Loss	≥ 45 dB(UPC), ≥ 50 dB(APC)	
Isolation	≥ 25 dB	CWDM Wavelength
Directivity	≥ 55 dB	
PDL	≥ 0.3 dB	
Operating Temp.	$-30 \sim 85^{\circ}\text{C}$	