

OFC-NAP-16SN

OFC-NAP-16SN connects, branches and distributes the fiber optic cables for FTTH subscriber distribution. It is installed on an inner/outer wall, and able to be mounted on a telephone pole and a wall. It is easy to expand an outer line for subscribers.



Features

- Rigid body, light weight, UV proof and weather proof structure.
- 8-circuit or 16-circuit used for subscribers.
- Accommodating lead-in Cables, smallest sized Cables, fiber optic micro cables, drop cables for subscribers.
- Accommodating optical splitters and a convenient structure to arrange the cables.
- RN input (for both fusion/mechanical connection) connection mount plate, splitter mount plate, and ribbon mount plate are separated.
- Its soft material allows ease of mounting, and it is rigid and patent registered.
- Subscriber lines using field assembly connectors are fixed separately and easy to be extended.
- Double locking structure
- Accommodating both mechanical/fusion connection simultaneously.


Application

- Pole, Wall

Specification



- Dimension/Weight : 301mm x 96mm x 254mm /1.3kg
- No. Entry port : 3ea
- No. of tray : 1ea
- Connection Capabilities : Single(12Core), Double(24Core)
- Subscriber port : 16port(Cable diameter Φ 3mm)
- Optical Splitter : 1x8 2ea or 1x16 1ea
- Cable Diameter : Φ 3mm ~ Φ 18mm
- Splice method : Fusion, Mechanical
- IP65 Standard

Accessories

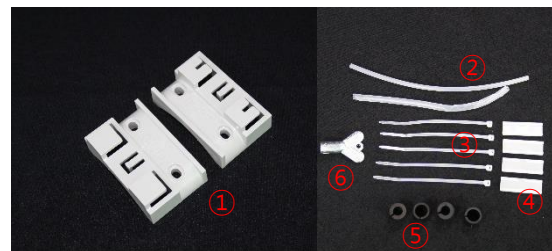

- ① Mount hanger : 2pcs
- ② Protection tube (200mm) : 2 pcs
- ③ Cable tie(100mm) : 5 pcs
- ④ Splitter holding pad : 4pcs
- ⑤ Rubber band : 4pcs
- ⑥ Key : 1pc

Technical Drawing

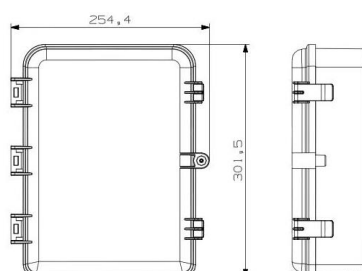

(mm)