
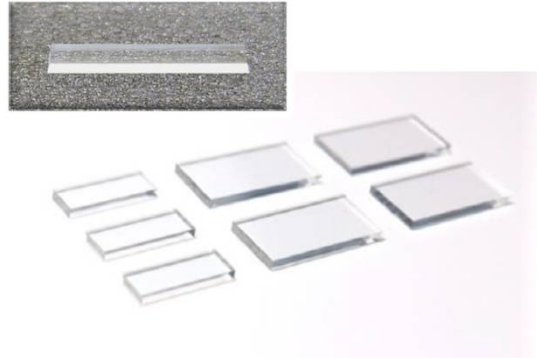


Optical Splitter Chip & Wafer

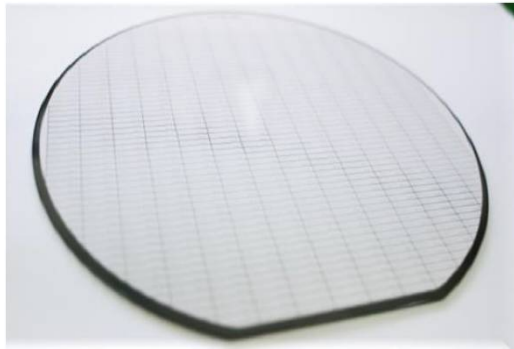

Specification

| Ch. | Confidence Zone chips | Yield(Avg.) | Total Lived Chips | P-grade (IL/Uni/PDL) |
|---------|-----------------------|-------------|-------------------|----------------------|
| 1x2 | 811 | 93 | 754 | 3.6/0.5/0.15 |
| 1x4 | 913 | 93 | 849 | 6.8/0.5/0.15 |
| 1x8(F) | 455 | 93 | 423 | 10.0/0.6/0.15 |
| 1x8(H) | 708 | 93 | 658 | 9.8/0.6/0.15 |
| 1x16(H) | 382 | 90 | 343 | 13.0/0.8/0.15 |
| 1x32(H) | 156 | 90 | 140 | 16.2/1.0/0.2 |
| 1x64(H) | 60 | 80 | 48 | 19.5/1.0/0.2 |