

OFC-ATB

ATB is a user terminal product to realize FTTD solutions with its inner space designed reasonably, which can be suitable for cold-link, hot-welding, and fast connector.


Used in home or working area to accomplish the access and port output of dual-core fiber, able to fully satisfy the requirements of fiber bending radius and well protect incoming and outgoing fibers so as to provide safe protection for fiber core; proper curvature radius, allowed small redundant fiber inventory, able to realize FTTD (Fiber To The Desk) system application.



Product information

- Dimension : 86mm x 86mm x 23mm
- Weight : 51g
- Adopt flame retardant ABS and PC materials
- Tensile strength of drop cable is more than 50 N
- Allows more than 0.5 meter redundant fiber inventory
- Designed as seal structure to prevent dust from entering

Technical Drawing

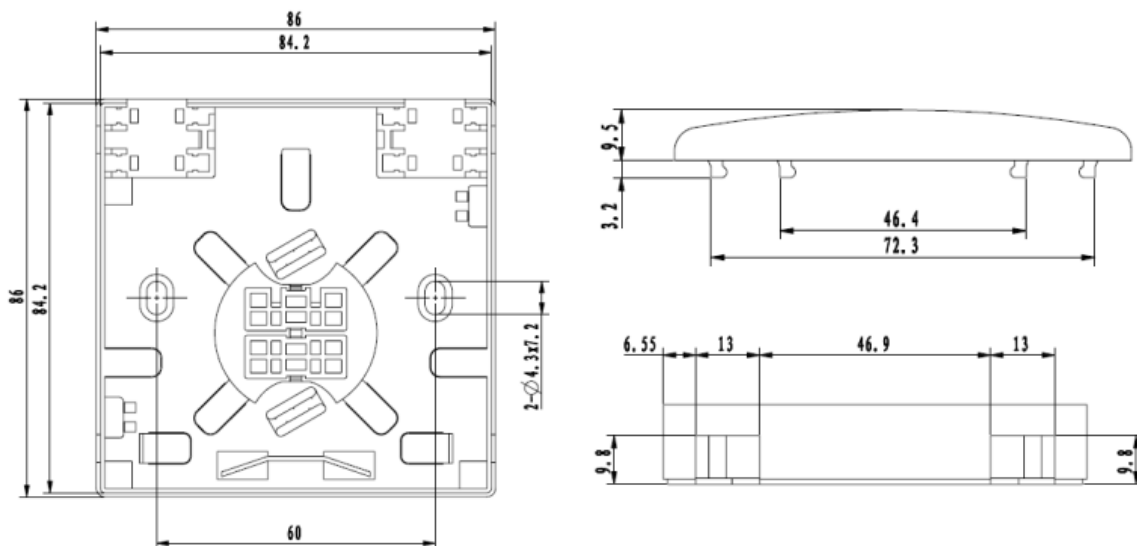

(mm)